


# 120-volt Under Cabinet Bar Light

Three selectable white temperature options

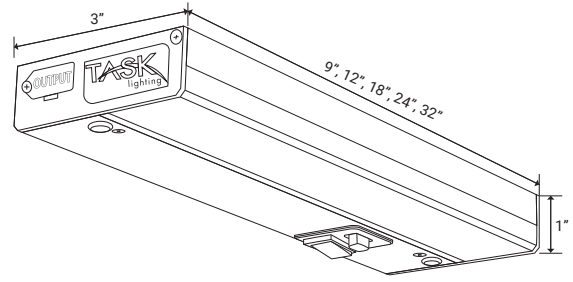

PART NUMBER	DESCRIPTION	DIMENSIONS	LUMENS PER FIXTURE	TOTAL WATTS PER FIXTURE	FINISH OPTIONS	KELVIN TEMP.
L-BL09-- <i>Finish</i> -TW	9" 120-volt Bar Light with 3 selectable white temperature options	9-1/2" x 3" x 1"	340	5	Black (BK) Dark Silver (DS) White (WT)	3000K/4000K/5000K/ Selectable
L-BL12-- <i>Finish</i> -TW	12" 120-volt Bar Light with 3 selectable white temperature options	11-7/8" x 3" x 1"	480	7	Black (BK) Dark Silver (DS) White (WT)	3000K/4000K/5000K/ Selectable
L-BL18-- <i>Finish</i> -TW	18" 120-volt Bar Light with 3 selectable white temperature options	17-7/8" x 3" x 1"	700	9.5	Black (BK) Dark Silver (DS) White (WT)	3000K/4000K/5000K/ Selectable
L-BL24-- <i>Finish</i> -TW	24" 120-volt Bar Light with 3 selectable white temperature options	23-15/16" x 3" x 1"	950	12	Black (BK) Dark Silver (DS) White (WT)	3000K/4000K/5000K/ Selectable
L-BL32-- <i>Finish</i> -TW	32" 120-volt Bar Light with 3 selectable white temperature options	31-15/16" x 3" x 1"	1300	16	Black (BK) Dark Silver (DS) White (WT)	3000K/4000K/5000K/ Selectable

*Blue indicates choice selection. L-BL18-BK-TW (Example part number for 18" Bar Light, Black Finish)*

## FEATURES

- 3 White light temperature selectable via a switch on face, select between 3000K, 4000K, or 5000K
- No separate power supply needed
- Hardwired or Plug-in ready (cord sold separately)
- Linkable (end-to-end connector included; linking cable sold separately)
- 90+ CRI (Color Rendering Index – true color)
- Simple installation
- 5-year limited warranty
- Designed for indoor applications
- No UV or IR
- Dimmable (with compatible wall dimmer)
- Switch on device for high–medium–off light output
- 50,000 hour LED life at 70% lumen maintenance

## APPLICATIONS

- Under cabinet
- Under shelf
- Office

## TECHNICAL INFORMATION

<b>Input Voltage</b>	120-volt
<b>Color Temperature (Kelvin)</b>	Soft white 3000K Cool white 4000K Daylight white 5000K
<b>CRI (Color Rendering Index)</b>	90+
<b>LED Type</b>	2835 SMD
<b>IP Rating</b>	IP40
<b>Dimmable</b>	10% – 100%
<b>Rating</b>	ETL/FCC/CA Prop 65
<b>Rated Life</b>	50,000 hrs
<b>LED Beam Angle</b>	110°
<b>LED Spacing</b>	1/4"
<b>Mounting</b>	Screws (included)
<b>Wiring</b>	12–14 gauge solid (hardwired option) Plug-in cord (sold separately for plug-in option)
<b>Operating Temperature</b>	-4°F to 122°F (-20°C to 50°C)
<b>Environment</b>	Dry locations
<b>Construction Material</b>	Aluminum with acrylic lens
<b>Warranty</b>	5 years